
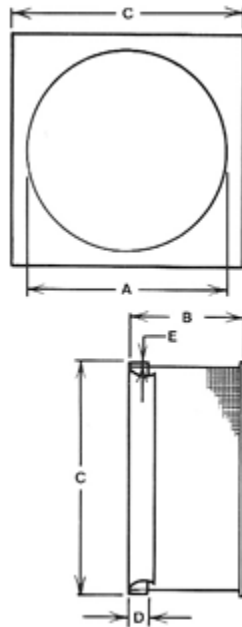


## INDUSTRIAL MANCOOLERS

### WALL VENT SERIES

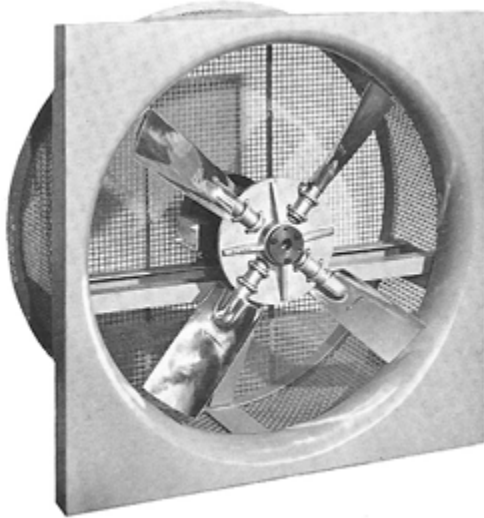

**THE DILLON WV INDUSTRIAL FAN** is a true industrial-grade fan for ventilating or exhausting air. It utilizes the new FULL-FLO propeller for high efficiency at low noise levels.

**The WV also features:**

- Heavy gauge steel venturi
- OSHA-approved guard
- American-made TEFC motor
- Optional automatic shutter
- Optional exterior guard
- Optional duct adaptor

MODEL NO.	FAN DIAMETER	H.P.	RPM	FRAME	CFM	DIMENSION			
						B	C	D	E
* 2405-18	24	½	1725	56	7200	17	36	2¾	14
2410-18	24	1	1725	56	8200	17	36	2¾	14
2410-12	24	1	1140	56	8300	17	36	2¾	14
2420-18	24	2	1725	56	11000	17	36	2¾	14
3010-18	30	1	1750	143T	12000	17	36	2¾	14
3015-12	30	1½	1140	145T	13000	19	36	2¾	14
3020-18	30	2	1750	145T	15500	19	36	2¾	14
3620-12	36	2	1140	184T	19500	19	42	2¾	14
3630-18	36	3	1750	182T	22000	19	42	2¾	14
3650-18	36	5	1750	184T	24600	19	42	2¾	14
4250-18	42	5	1750	184T	31200	19	48	2¾	14
4250-12	42	5	1150	215T	33000	23	48	2¾	14

\* When ordering the Wall Vent model, prefix the Model No. with WV